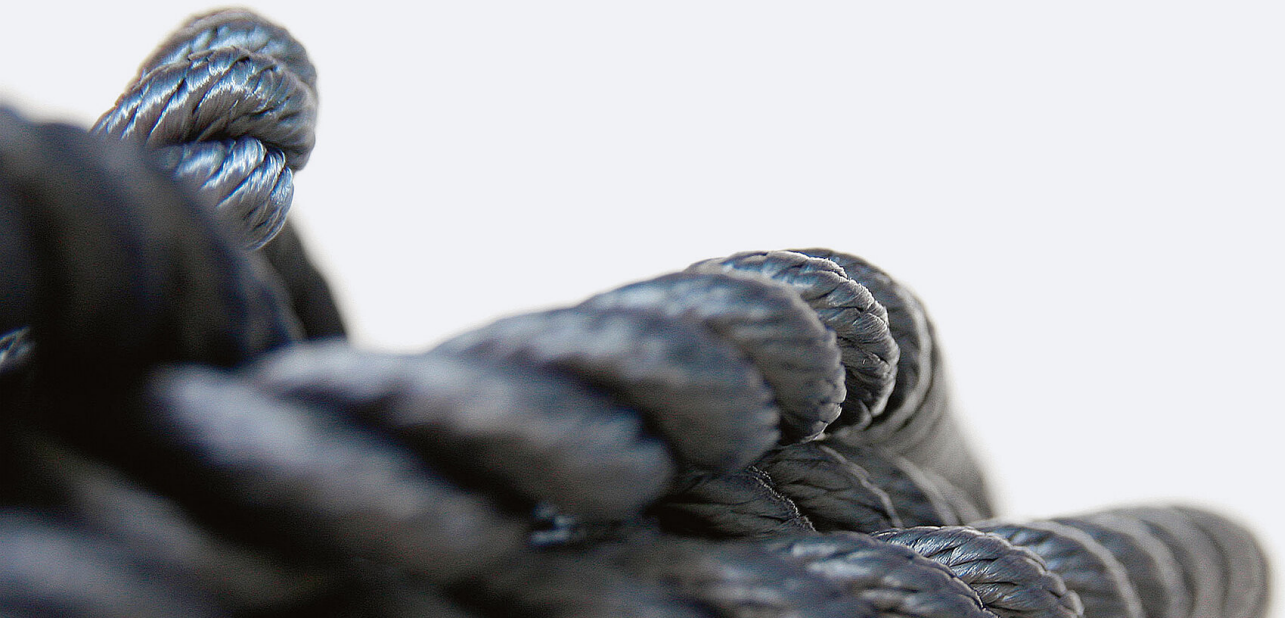

GeoTwist® Polyester

Defence

Extremely durable, flexible and economic mooring line

Indestructible

Extremely robust and durable, without hardening, best UV resistance.

Quality pays dividends

Carefully constructed, high quality line at a low price.

Universal

Excellent mooring line, also suitable as anchor warp due to its sag line in water.

Nominal diameter

6.00 - 24.00 mm

Construction

Gleistein

More than Ropes.

Technical data

Elongation at 10% of the breaking load: 4.00 %

Nominal diameter [inch]	Weight [lbs/100 ft]	Spliced break load [lbf]	Linear break load [lbf]
1/4	1.83	1,461.26	1,623.12
5/16	3.26	2,585.30	2,873.06
13/32	5.09	4,158.97	4,622.07
1/2	7.32	6,744.27	7,492.88
9/16	10.01	8,767.55	9,740.97
5/8	13.04	11,240.45	12,490.38
3/4	16.53	14,387.77	15,986.16
13/16	20.36	18,883.95	20,981.42
7/8	24.66	22,031.28	24,479.45
1	29.37	25,853.03	28,726.09